


TUBULAR BURNER INSTALLATION INSTRUCTIONS

Turn Gas Off at Supply Before Working on the Grill. No Smoking or Open Flame!

1) REMOVE OLD BURNER: There may be screws, pins or other fastening devices that hold the burners in place. Carefully note the disassembly process as reassembly is essentially the opposite procedure.

Now is an opportune time to clean the grill's interior of debris, accumulated food, grease, etc.

2) INSTALL NEW BURNER: Refasten as originally installed. The burner should go over the valve orifice $\frac{1}{4}$ " to $\frac{1}{2}$ " similar to the original. See Figure A.

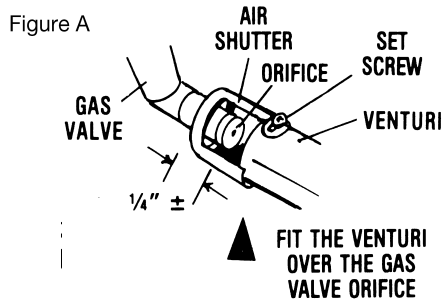


3) TEST BURNER: Turn on the gas and light the replaced burner noting the flame pattern. Wait several seconds. The Flame should be even and mostly blue, although some yellowness will normally occur.

CAREFUL, PARTS MAY BE HOT!

If adjustment is necessary, loosen the air shutter screw and rotate the air shutter slowly in either direction until the correct flame is attained. Retighten the screw.

MINIMAL YELLOW TIPS

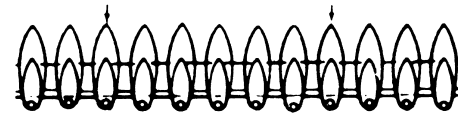

**FLAME SHOULD BE A HARD BLUE CONE.
SOME YELLOW DUST FLECKS MAY OCCUR.**